

WALL PANELS ENGRAVED

designed by ARS

The wall panels collection, made out of PET-Felt, ensures the acoustic performance of a space with a stylish touch.

Every model connects seamlessly with its copy, in order to create an endless composition.

ASKIA

www.askiafurniture.ro



PRODUCT DETAILS

Characteristics



Diffusion




Absorption

Weight	Material	Thickness	Applications
2400 g/mp	PET-Felt	12 mm/0.4 inch	Indoor areas only


Color

Slight color deviations may occur since the PET Felt panels are made from recycled fibers. It is recommended to use the same batch per project. When placing an order take a margin into account for unforeseen changes or additions to a design plan.

Standard



Non-Standard*

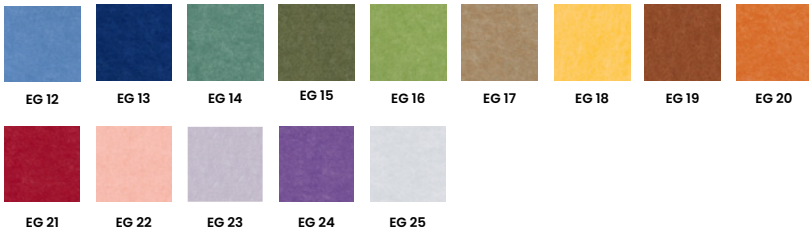

*A minimum quantity order is required for non-standard colors.

Fire Rating

B-s1, d0 classification

Environment

ASKIA PET is 50% recycled
ASKIA PET is 100% recyclable

How to order



Consult your project area



Decide how many panels you need




Contact us for questions and order

Installation

To install the panels, we recommend using a polymer adhesive sealant, such as Bison Poly Max High Track. The advantage of using this one is that it does not harden immediately, so you can still make adjustments while mounting.

The kit is not included with the panels, but can be found at any construction materials store.

Dimensions

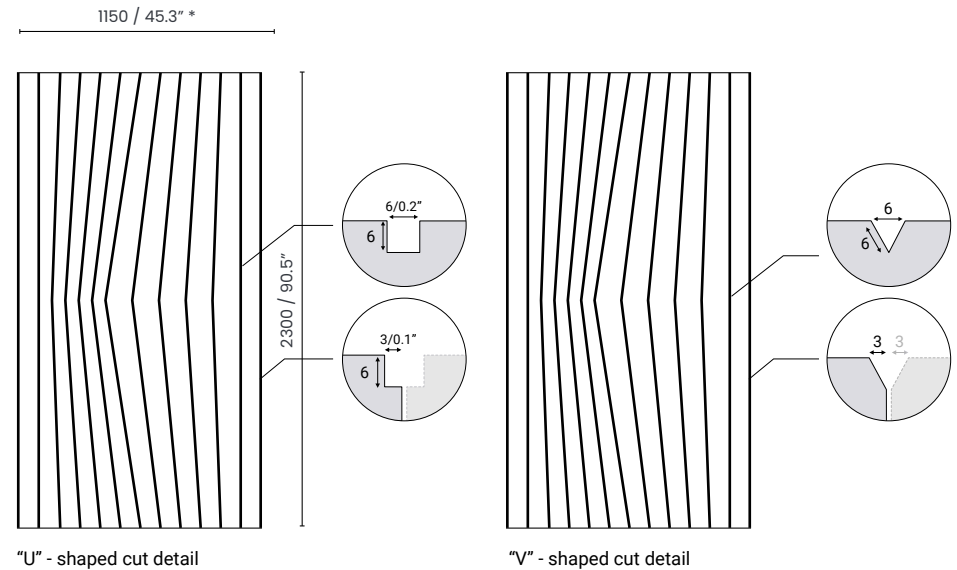

* Dimensions are mentioned in millimetres and inches : mm / inch


Care Instructions

- Vacuum to remove dust.
- PET Felt is easy to clean and maintain. Most stains can be removed with plenty of water. Let the water drip through and blot the stain with a dry cloth.
- Never rub the PET Felt, as it can damage the material.
- If water is not sufficient, stubborn stains can be removed with professional


cleaning products like the Dr. Beckmann products. Depending on the type of stain, the Dr. Beckmann products provides different solutions. It is advised to try a cleaning product out on an invisible spot prior to its application on a visible area. Please, read the manufacturer's manual to choose the suitable type of treatment.

- Polyester carpet and fabric cleaners can be used. Always test an inconspicuous area first.


ARC

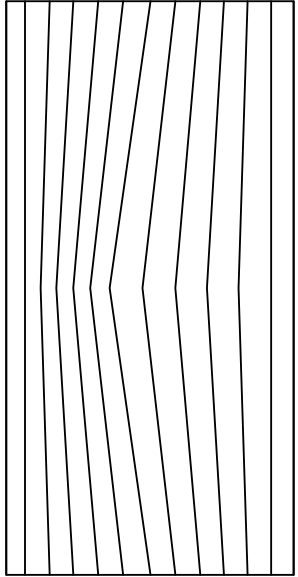


LAYOUT EXAMPLE

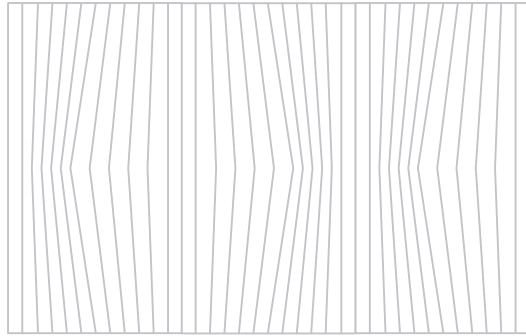


TEMPO

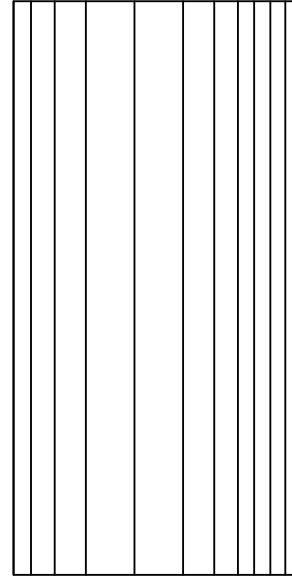


LAYOUT EXAMPLE

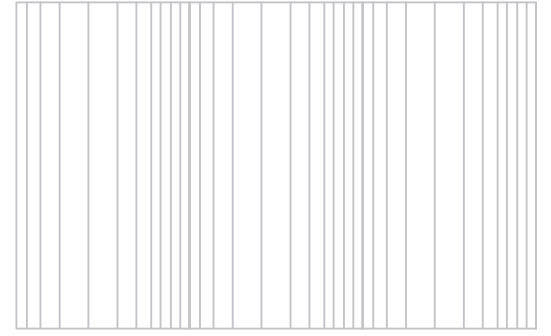


RAINBOW

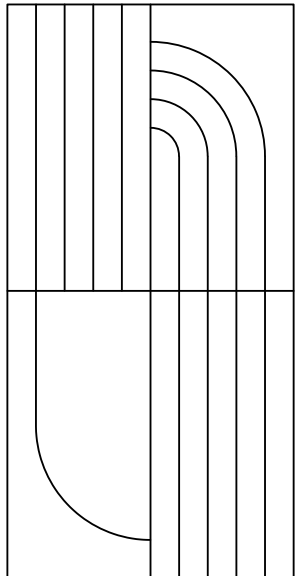

LAYOUT EXAMPLE

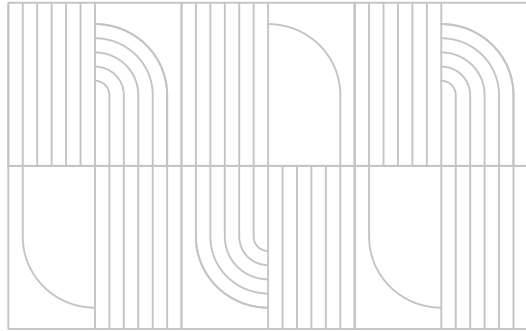


TRIP

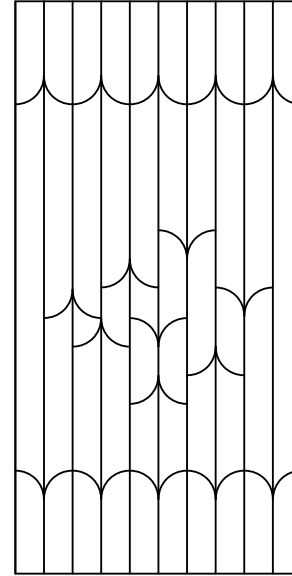


LAYOUT EXAMPLE




FIELD I (A)

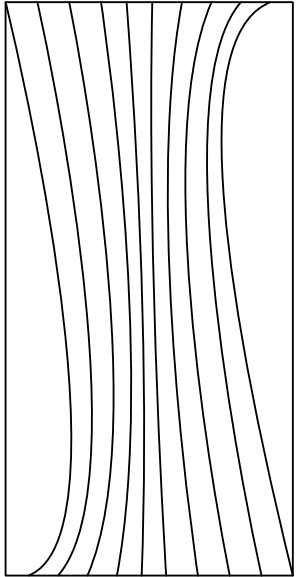



LAYOUT EXAMPLE

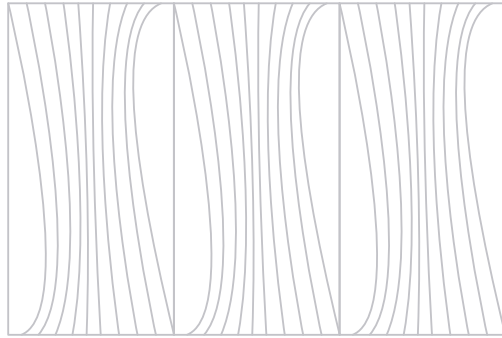

FIELD II (B)

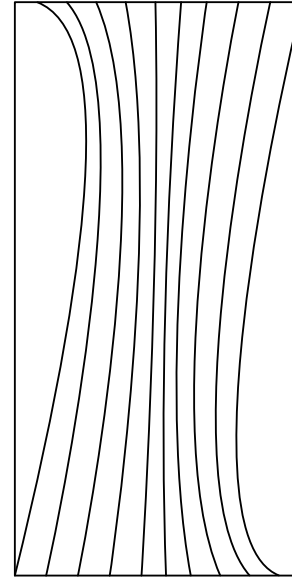


LAYOUT EXAMPLE

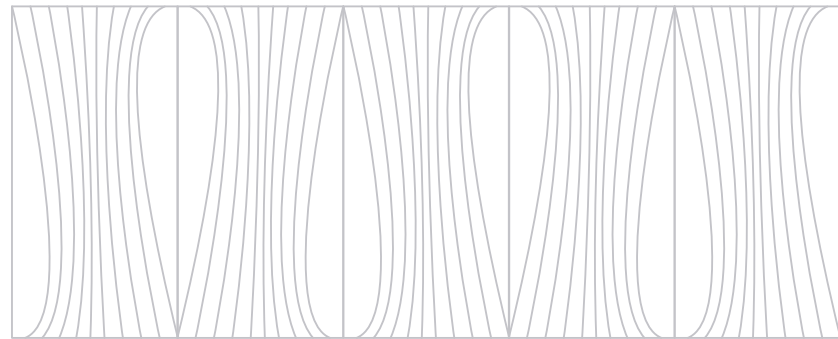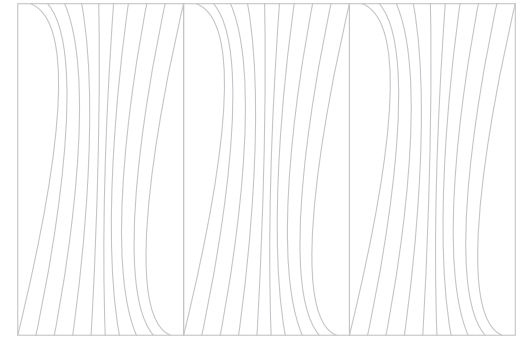


A B A B A


VAIL

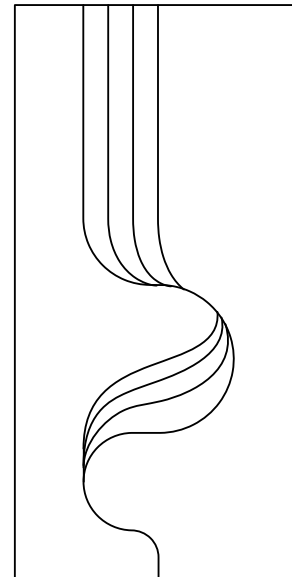


LAYOUT EXAMPLE

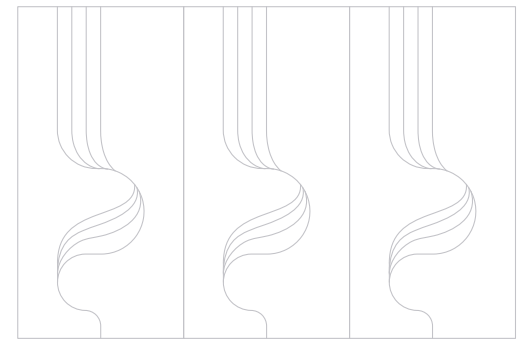


BOUNCE I (A)

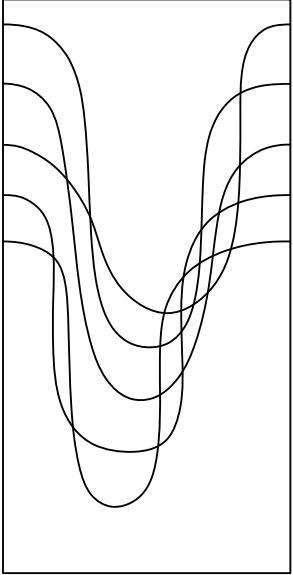



LAYOUT EXAMPLE _____

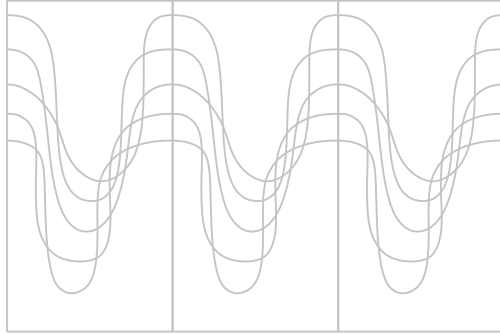

BOUNCE II (B)

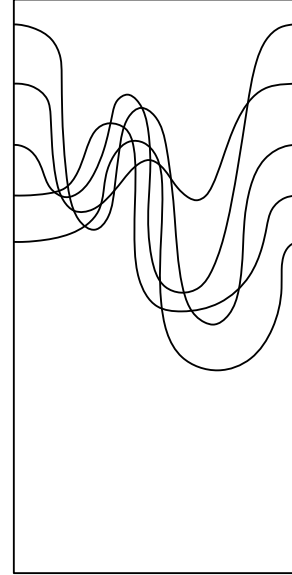


LAYOUT EXAMPLE _____

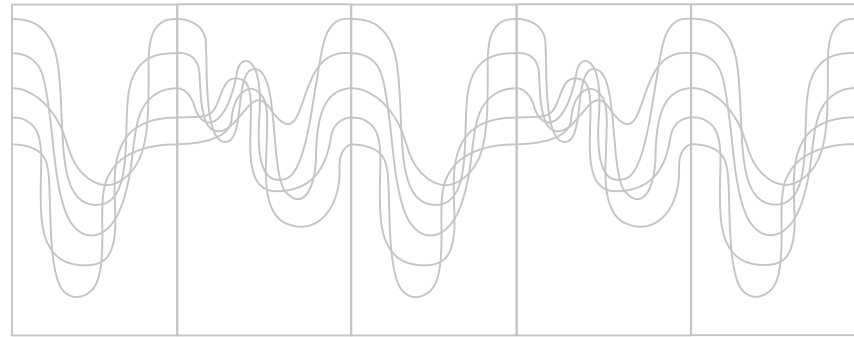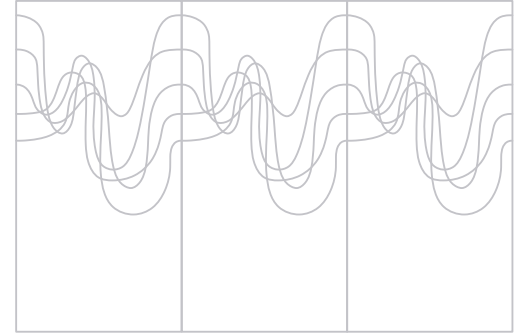


A B A B A


DRAGONFLY

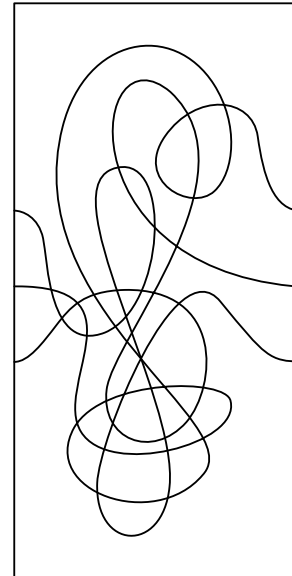


LAYOUT EXAMPLE _____

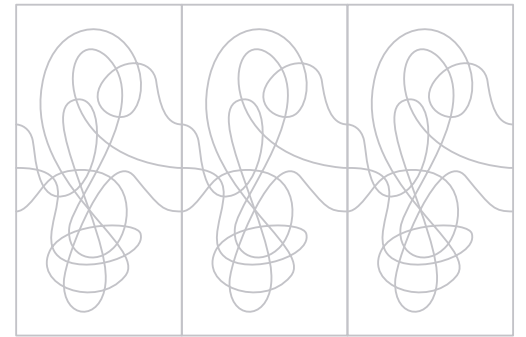

TARGET

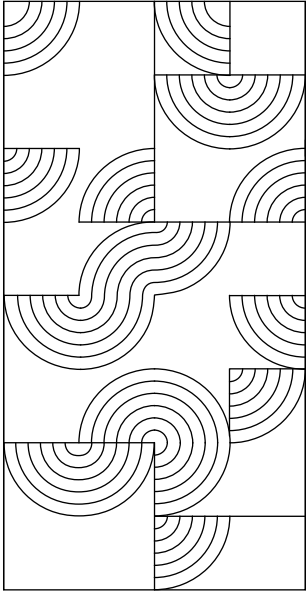

LAYOUT EXAMPLE

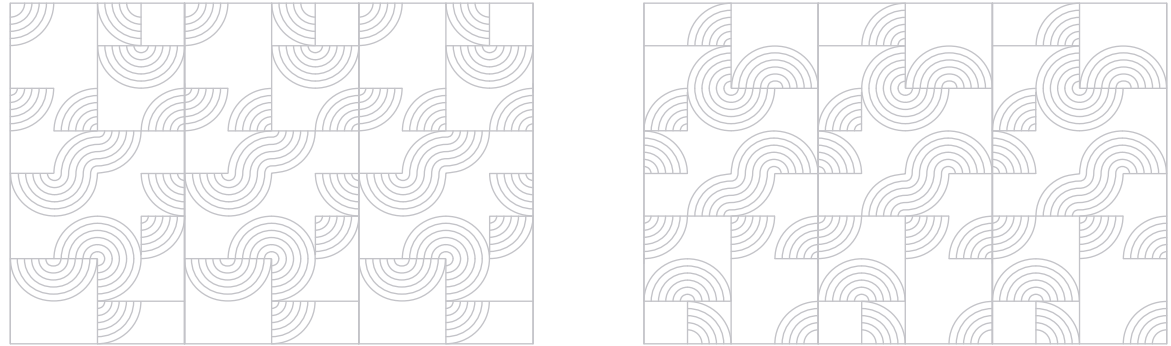

DATASHEET PET-FELT BOARD 12 MM

- Frequency range according to the standard
- Measured characteristics

