



ROOM DIVIDERS INTERACTIVE PANELS

designed by ARS

The acoustic quality of the pet felt panel is enriched by its interactive feature, in regard with its users.

You can move around the attached elastic in any way, creating a unique personal pattern

ASKIA

www.askiafurniture.ro



PRODUCT DETAILS

Characteristics



Diffusion




Absorption

Weight	Material	Thickness	Applications
2400 g/mp	PET-Felt	12 mm/0.4 inch	Indoor areas only

Color

Slight color deviations may occur since the PET Felt panels are made from recycled fibers. It is recommended to use the same batch per project. When placing an order take a margin into account for unforeseen changes or additions to a design plan.

Standard

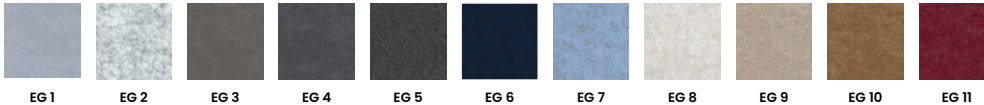

Non-Standard*



Rope Color



*A minimum quantity order is required for non-standard colors.

Fire Rating

B-s1, d0 classification

Environment

ASKIA PET is 50% recycled
ASKIA PET is 100% recyclable

How to order



Consult your project area



Decide how many panels you need





Contact us for questions and order

Installation

To install the panels, we recommend consulting the Suspended Panels Assembly Manual.

Dimensions

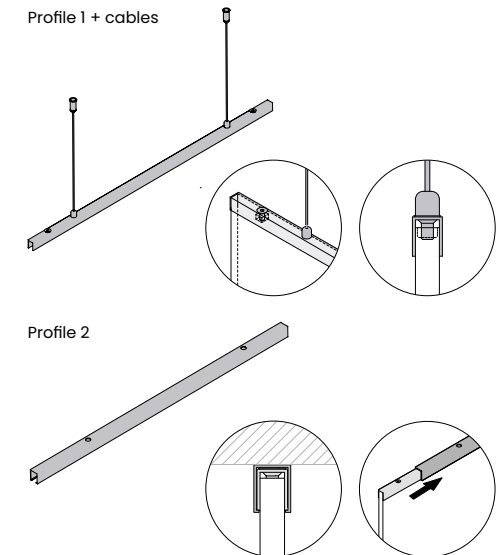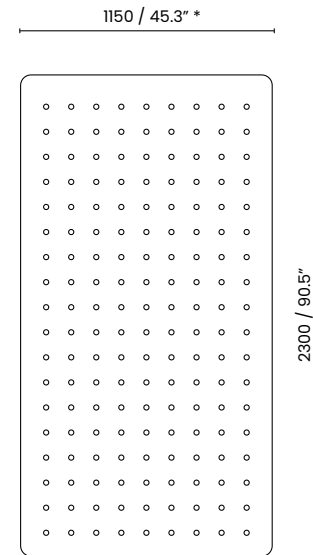

* Dimensions are mentioned in millimetres and inches : mm / inch


Care Instructions

- Vacuum to remove dust.
- PET Felt is easy to clean and maintain. Most stains can be removed with plenty of water. Let the water drip through and blot the stain with a dry cloth.
- Never rub the PET Felt, as it can damage the material.
- If water is not sufficient, stubborn stains can be removed with professional


cleaning products like the Dr. Beckmann products. Depending on the type of stain, the Dr. Beckmann products provides different solutions. It is advised to try a cleaning product out on an invisible spot prior to its application on a visible area. Please, read the manufacturer's manual to choose the suitable type of treatment.

- Polyester carpet and fabric cleaners can be used. Always test an inconspicuous area first.


FIXING SYSTEMS

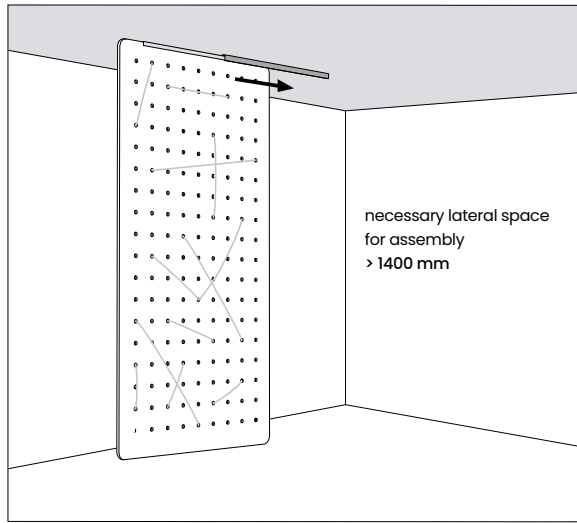

Ceiling Mounted

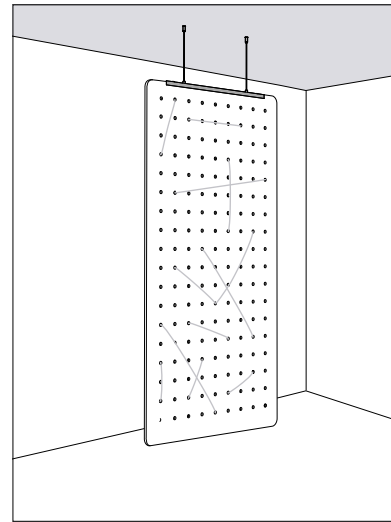


Ceiling Suspended

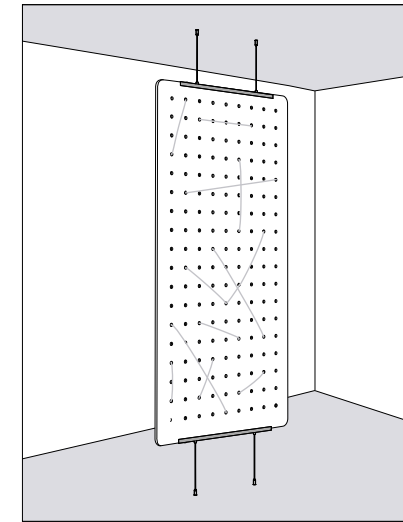

Ceiling and Floor Suspended

DATASHEET PET-FELT BOARD 12 MM

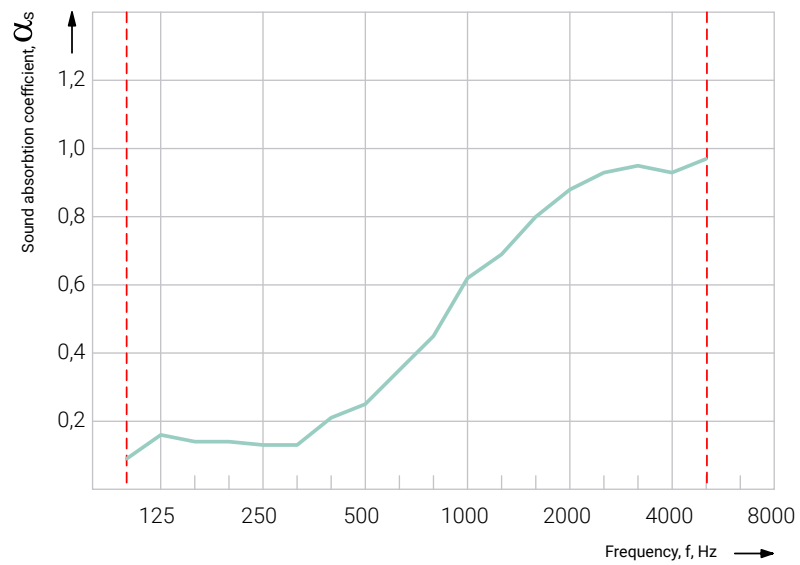

- Frequency range according to the standard
- Measured characteristics