



## ROOM DIVIDERS INTERACTIVE PANELS

designed by ARS

The acoustic quality of the pet felt panel is enriched by its interactive feature, in regard with its users.

You can move around the attached elastic in any way, creating a unique personal pattern

**ASKIA**

[www.askiafurniture.ro](http://www.askiafurniture.ro)



## PRODUCT DETAILS

### Characteristics



Diffusion



Absorption

### Material

PET-Felt  
Weight: 2400 g/m<sup>2</sup>  
Thickness: 12 mm/0.4 inch

### Applications

Indoor areas only


### Shipment

Flat pack

### Color

Slight color deviations may occur since the PET Felt panels are made from recycled fibers.

#### Standard



#### Non-Standard\*



#### Rope Color



\*A minimum quantity order is required for non-standard colors, for more details please check our online configurator.

### Fire Rating

B-s1, d0 classification  
ASTME84 Class A



### Environment

ASKIA PET is 50% recycled  
ASKIA PET is 100% recyclable  
Zero carbon manufacturing  
Low formaldehyde emission

### Installation

To install the panels, we recommend consulting the Suspended Panels Assembly Manual.

### Dimensions

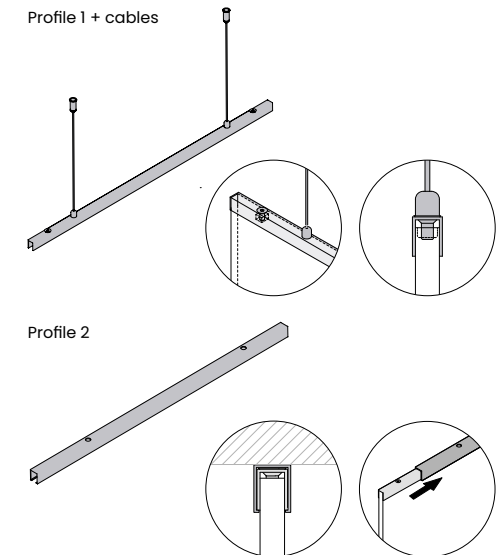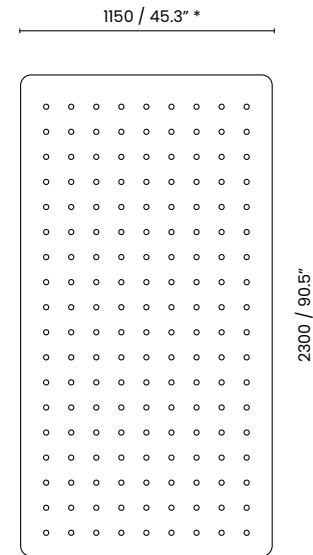


\* Dimensions are mentioned in millimetres and inches : mm / inch

### Care Instructions

- Vacuum to remove dust.
- PET Felt is easy to clean and maintain. Most stains can be removed with water, then the material can be patted dry with a clean cloth.
- Never rub the PET Felt, as it can damage the material.
- Polyester carpet and fabric cleaners can be used. Always test an inconspicuous area first.

### How to order



Consult your project area




Decide how many panels you need




Use our configurator for orders


## FIXING SYSTEMS

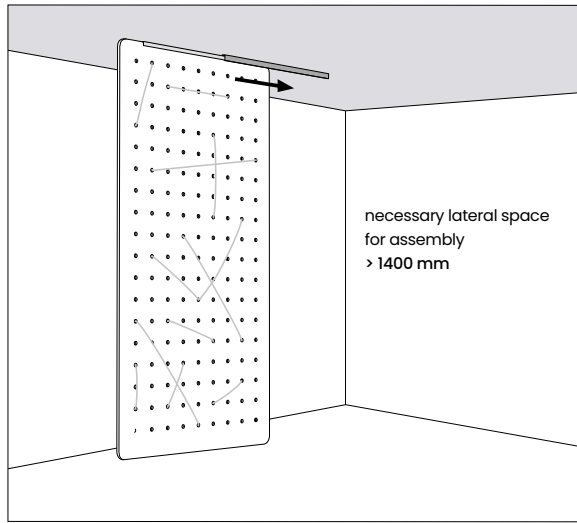

Ceiling Mounted

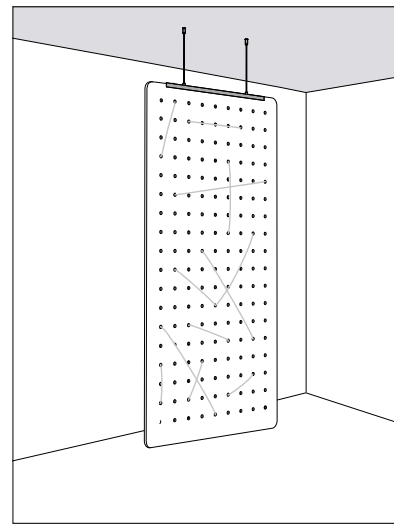

Ceiling Suspended

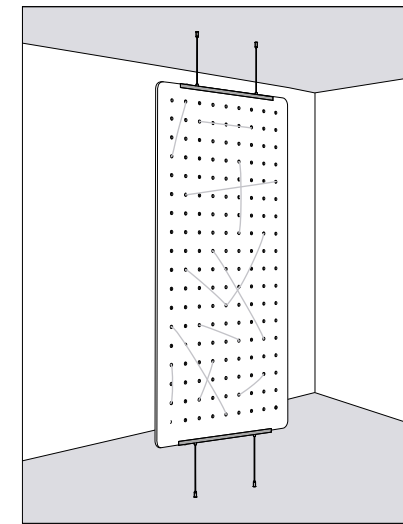

Ceiling and Floor Suspended

## DATASHEET PET-FELT BOARD 12 MM

- Frequency range according to the standard
- Measured characteristics

