



DESK PANELS


Designed by ARS


The Desk Panels Collection enhances privacy and reduces noise at the workstation level, making them an ideal choice for open-plan offices and bench configurations. Easy to install and available in a wide range of colors, these panels combine clean aesthetics with outstanding acoustic performance.

contact@askiafurniture.ro | www.askiafurniture.ro


ASKIA


DIMMENSIONS

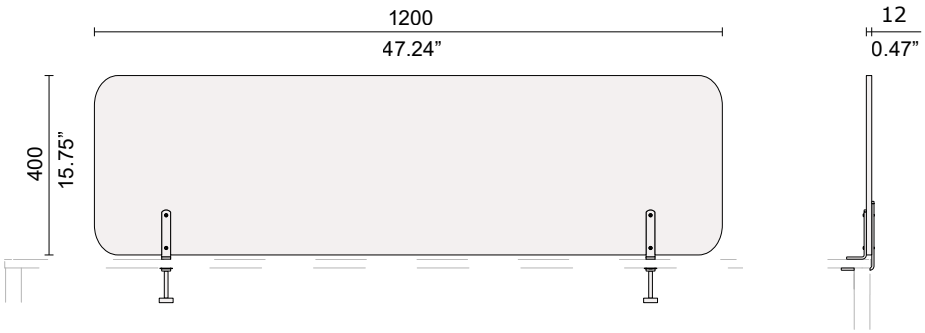

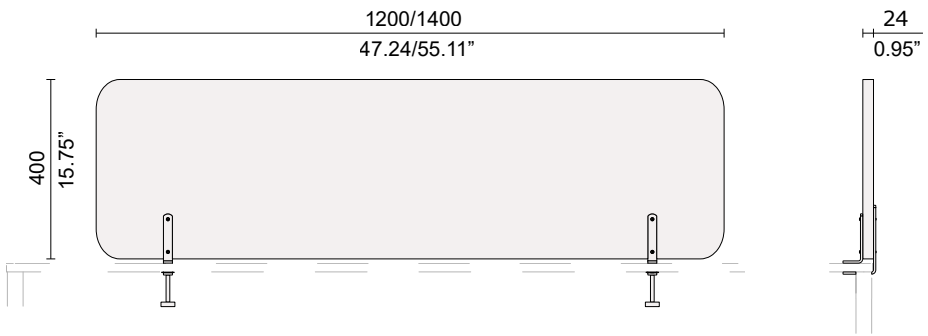

FIXING SYSTEM

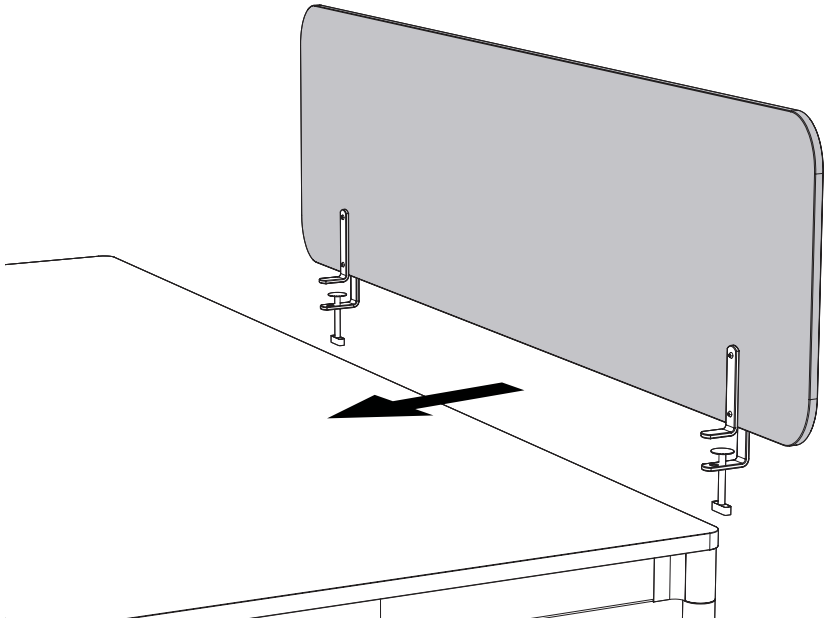

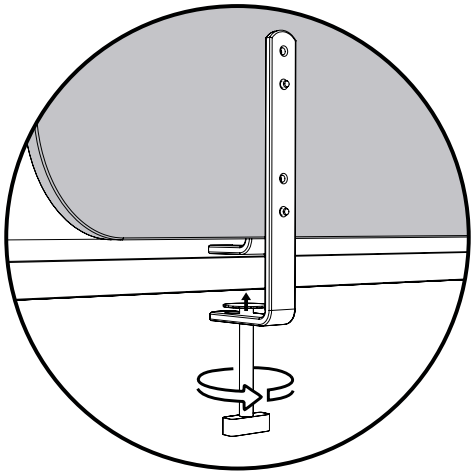

TECHNICAL DATA

FINISHES

Slight color deviations may occur since the PET Felt panels are made from recycled fibers.

12MM | Standard



12MM | Non-Standard*




24MM | Standard


24MM | Non-Standard*



*A minimum quantity order is required for non-standard colors, for more details please contact us.

Datasheet Pet-Felt board 24 mm /0.9”

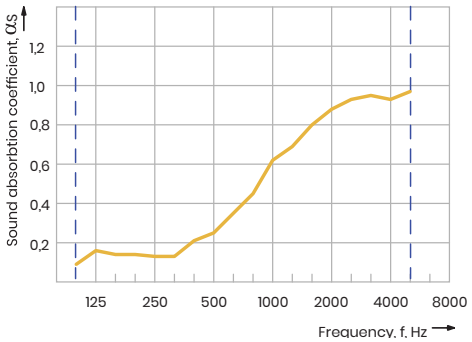

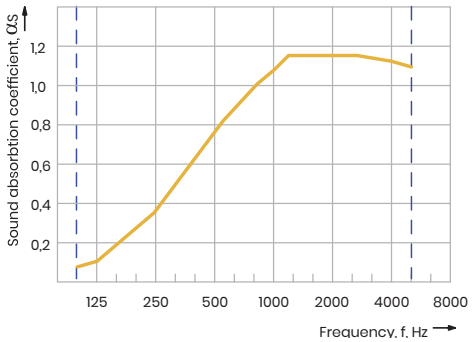

Frequency range according to the standard

MATERIAL SPECIFICATIONS

Material Type	PET-Felt
	Weight: 12mm - 2400 g/m²; 24mm - 4000 g/m²
	Thickness: 12 mm/0.4 inch; 24 mm/0.9 inch
Fire Rating	B-s1, d0 classification
	ASTME84 Class A
Enviroment	ASKIA PET is 50% recycled
	ASKIA PET is 100% recyclable
	Zero carbon manufacturing
	Low formaldehyde emmision
Applications	Indoor areas only

CARE INSTRUCTIONS

Vacuum to remove dust.
PET Felt is easy to clean and maintain. Most stains can be removed with water, then the material can be patted dry with a clean cloth.
Never rub the PET Felt, as it can damage the material.
Polyester carpet and fabric cleaners can be used.
Always test an inconspicuous area first.

ACOUSTIC PROPERTIES



Diffusion Absorption